


PRODUCT


B506 04A

DESCRIPTION

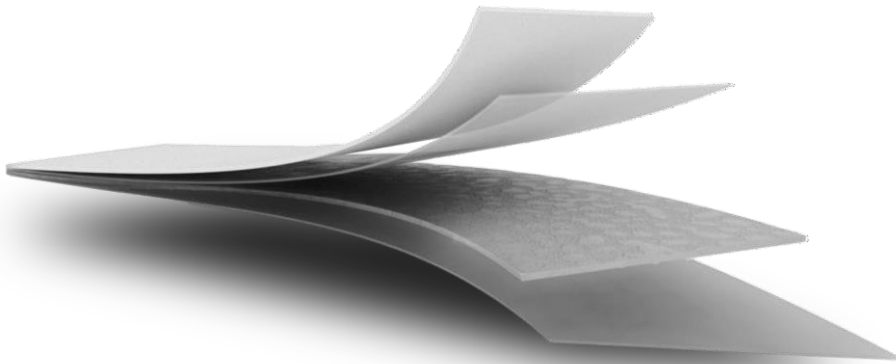

- PE foam 1mm 67dns double side coated tape
- Double side water based acrylic adhesive 60gr/m²
- Siliconized Glassine Avana Liner

PROPERTIES	UNIT	VALUE	TEST METHOD
Weight of Liner	gr/m ²	110± 10%	INTERNAL
Weight of Tape	gr/m ²	60± 10%	INTERNAL
Tack(φ11 Ball)	cm	≤5	PSTC-6
Shear at 23°C	hr	<5	PSTC - 107
Service Temperature	°C	(-20)° C/ (+120)° C	

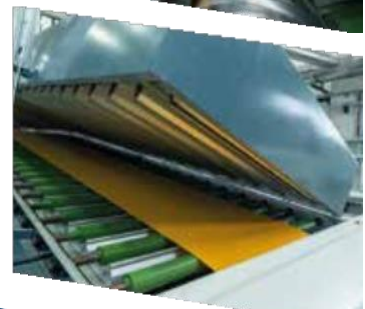

APPLICATION FIELDS

- Clean, quick and easy to use Silicone protector Permanent adhesive
- Conformable foam 1mm Permanent adhesive
- Ideal for bonding PU foams, PE foams, bitumen, felt, fleece and plastic materials
- General usage for bonding
- Suitable for lamination
- Extra powerful tack, strong adhesion and good cohesion
- Immediate and long-lasting fixing on many materials
- excellent conformability to compensate for surface irregularities • Imperceptible and odorless
- Good resistance to aging
- Solvent-free, suitable for indoor applications

STORAGE

- Recommended shelf life is 12 months with original packing, store product in dry cool place away from direct sunlight. recommended warehouse temperature 21°C and humidity of %50.
- Tapes should be protected against external harming factors

MEASUREMENTS

- 1000mm x 50m to 3000m
- 1600mm x 50m to 3000m

Variety of measurements are possible upon request

RECOMMENDATIONS

Products mentioned in technical data sheet could and should be used in various applications and surfaces. Application surfaces must be clean, dry and free of any possible release agents. All BNT tapes products are strictly be subjected to quality control methods in every step from raw material, production and before shipment. BNT has original packing method which focus to prevent quality problems during transportation even at hard conditions, rather than BNT would not accept any responsibility.